Samduo


# Easy to Install Widely Compatible



Guangdong Sanduo Power Technology Co., Ltd


Samduo

# **Product Usage Diagram**

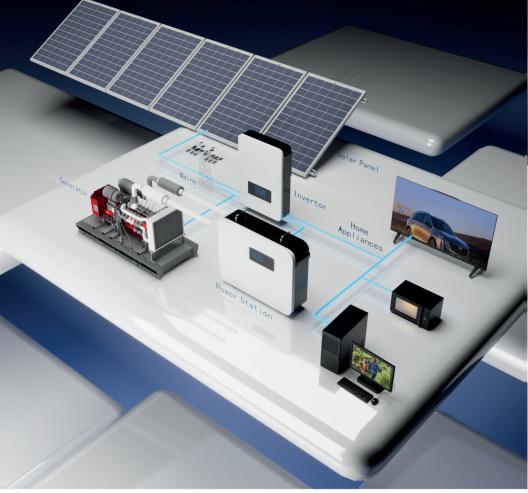





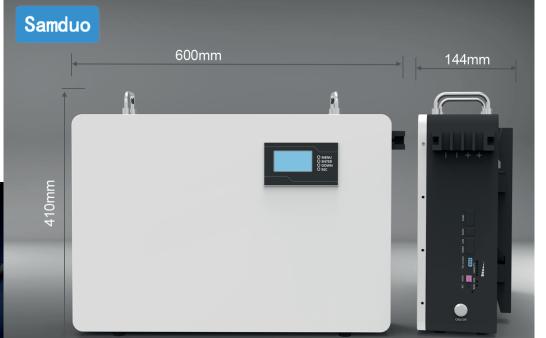

Product Name Power station

Capacity 5.12kWH

Strorage Temperature: -20°C -35°C

Type: Lithium iron phosphate

Communication Type: RS232, RS485, CAN

Operating voltage: 25.6V/43.2-58.4V

Cycle life: ≥6000 times

Product weight: 45KG

Product size: 410 \*144\* 600(mm)

IP Grade: IP54

Machine color: White





**Product Name** 

Power station

### 10/15 kilowatt-hours of electricity

Strorage Temperature: 10 °C -35 °C

Nominal Energy: 10.24kWh/16076Wh

Communication Type: RS232, RS485, CAN

Operating voltage: 43.2-58.4V

Cycle life: 8000 times

Product weight: 80KG/102KG

Product size: 420\*350\*572/520\*290\*650mm

IP Grade: IP54

Machine color: White

## Samduo

### **GUANGDONG SANDUO POWER TECHNOLOGY CO., LTD**

8 years of production experience in the lithium battery industry. The company is equipped with more than 200 automated production equipment and has reached cooperation with more than 5,000 customers. All products are produced by its own factory and support OEM/ODM customization services. The factory is large-scale, covering an area of 300,000 square meters and has more than 1,000 employees. With a highly independent R&D team and a complete supporting industrial chain, it has won more than 80 patent certifications. At present, the battery pack has 20+ production lines with a monthly output of up to 30W+.

Email: zengxui@chyixing.com

Phone: 0086-186 7223 4331



Email: carriehu@samduo.com

Phone: 0086-158 1856 4685



Jane Email: janezou@samduo.com



Wechat



WhatsApp

Address: No.1 Xintang Road, Ma'an Town, Huicheng District, Huizhou City, Guangdong Province, China



**Product Name** 

Power station

16076WH

Capacity

Type:

**-20** ℃ **-35** ℃ Strorage Temperature:

Lithium iron phosphate

RS232, RS485, CAN Communication Type:

43.2-58.4V Operating voltage:


8000 times Cycle life:

95KG Product weight:

500 \*270\* 700(mm) Product size:

IP54 IP Grade: White Machine color:



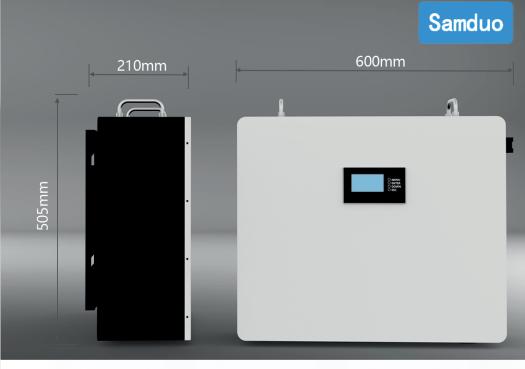

**Product Name** 

Power station

Capacity

10.24kWH

-20 °C -35 °C Strorage Temperature:

Type: Lithium iron phosphate

Communication Type: RS232, RS485, CAN

43.2-58.4V Operating voltage:

Cycle life: ≥6000 times

88KG Product weight:

505 \*210\* 600(mm) Product size:

IP Grade: IP54 White Machine color: